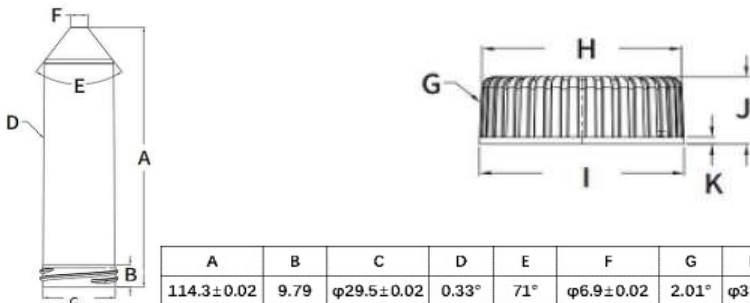


Technical Datasheet

Article - No:	PG-QA-R025-06-003	Revision: A0																					
Remarks	single use only																						
Specification																							
Product name	CT50B, 50ml Centrifuge tube																						
Production conditions	Class 100,000 clean room production																						
	No release agent is used																						
Classification	CE/IVDD																						
Dimensions																							
	<table border="1" style="width: 100%; text-align: center;"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> <th>D</th> <th>E</th> <th>F</th> <th>G</th> <th>H</th> <th>I</th> <th>J</th> <th>K</th> </tr> </thead> <tbody> <tr> <td>114.3±0.02</td> <td>9.79</td> <td>φ29.5±0.02</td> <td>0.33°</td> <td>71°</td> <td>φ6.9±0.02</td> <td>2.01°</td> <td>φ33.91</td> <td>φ34.8</td> <td>12.2</td> <td>1.28</td> </tr> </tbody> </table>		A	B	C	D	E	F	G	H	I	J	K	114.3±0.02	9.79	φ29.5±0.02	0.33°	71°	φ6.9±0.02	2.01°	φ33.91	φ34.8	12.2
A	B	C	D	E	F	G	H	I	J	K													
114.3±0.02	9.79	φ29.5±0.02	0.33°	71°	φ6.9±0.02	2.01°	φ33.91	φ34.8	12.2	1.28													
Colour	Clear tube with Orange cap																						
Graduation	Printing																						
Nominal Capacity	50ml																						
Material Characteristics	polypropylene (PP), premium surface																						
Performance parameters	Storage Temperature: -80°C~121°C																						
	Centrifugal force: 15000xg																						
Product Characteristics	biologically inert																						
	physiologically harmless																						
	no heavy metals according to EC/94/62																						
Purity Grade	free of RNase and DNase																						
	free of pyrogens																						
	free of PCR inhibitors																						
	free of human DNA																						
	free of endotoxins																						
	free of ATP																						
Shelf - Life	36 months at controlled storage conditions																						
Packaging	pcs per bag: 25																						
	pcs per case: 500																						
Storage	dry condition: 40%-60% rel. humidity																						